

# GrandSlate™ Application instructions

## Information Sheet

Updated: 2007



*Quality You Can Trust Since 1886...  
From North America's Largest Roofing Manufacturer™*




# GRAND SLATE™

LIFETIME DESIGNER SHINGLES

## APPLICATION INSTRUCTIONS

**Note:** These shingles must be nailed a nominal 8" (203mm) from bottom of shingles, above the cut-outs as shown. Nails must not be exposed.

Shingle Exposure: 7-1/2" (191mm)

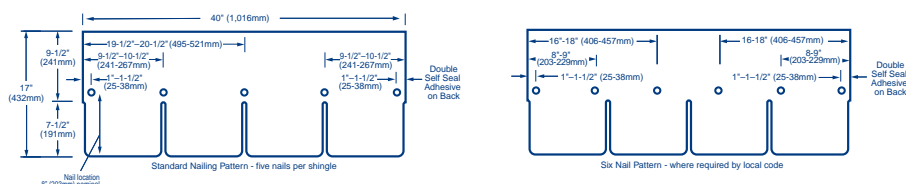

### GENERAL INSTRUCTIONS


- **ROOF DECKS:** Wood decks must be well seasoned, supported, and tightly constructed with maximum 6" (152mm) wide lumber, having adequate nail-holding capacity and a smooth surface. Plywood or OSB decking as recommended by APA-The Engineered Wood Assn. is acceptable. DO NOT fasten shingles directly to insulation or insulated deck unless authorized in writing by GAF-Elk. Roof decks and existing surfacing material must be DRY prior to application of shingles.
- **UNDERLAYMENT:** Underlayment beneath shingles has many benefits, including preventing wind-driven rain from reaching the interior of the building and preventing sap in some wood decking from reacting with asphalt shingles. Underlayment is also required by many code bodies and is required to maintain the UL Class A fire rating. Where an underlayment is to be installed, use a breather-type underlayment such as GAF-Elk Shingle-Mate®, Leatherback® or Deck-Armor™ underlayment.
- **FASTENERS:** Use only zinc-coated steel or aluminum, 10-12 gauge, barbed, deformed or smooth shank roofing nails with heads 3/8" (10mm) to 7/16" (12mm) in diameter. Fasteners should be long enough to penetrate at least 3/4" (19mm) into wood decks or just through the plywood decks. Fasteners must be driven flush with the surface of the shingle. Overdriving will damage the shingle. Raised fasteners will interfere with the sealing of the shingles and can back out.
- **WIND RESISTANCE/HAND SEALING:** These shingles have a special thermal sealant that firmly bonds the shingles together after application when exposed to sun and warm temperatures. Shingles installed in Fall or Winter may not seal until the following Spring. If shingles are damaged by winds before sealing or are not exposed to adequate surface temperatures, or if the self-sealant gets dirty, the shingles may never seal. Failure to seal under these circumstances results from the nature of self-sealing shingles and is not a manufacturing defect. To insure immediate sealing, apply 4 quarter-sized dabs of shingle tab adhesive on the back of the shingle 1" (25mm) and 13" (330mm) in from each side and 1" (25mm) up from bottom of the shingle. Press shingle firmly into the adhesive. For maximum wind resistance along rakes, install GAF-Elk Starter Strip Shingles with GAF-Elk Dura-Grip® sealant or

cement shingles to underlayment and each other in a 4" (102mm) width of asphalt plastic cement. CAUTION: Apply ONLY a thin uniform layer of asphalt plastic cement less than 1/8" (3mm) thick. Excess amounts can cause blistering of the shingles and may soften the asphalt in certain underlayments, including StormGuard®, Weather Watch® and other GAF-Elk Leak Barriers, resulting in the asphalt flowing, dripping and staining.


- **RELEASE FILM:** The film strips on the back of each shingle are to prevent sticking together of the shingles while in the bundle. Their removal is NOT required during application.
- **CANADIAN COLD WEATHER APPLICATIONS:** CSA 123.5-M90 mandates that shingles applied between September 1 and April 30 shall be adhered with a compatible field-applied adhesive. See "Wind Resistance/Hand Sealing" for the application of adhesive.
- **MANSARD AND STEEP SLOPE APPLICATIONS:** For roof slopes greater than 21" per foot (1750mm/m), shingle must be hand sealed (DO NOT use on vertical side walls). See "Wind Resistance/Hand Sealing" for the application of adhesive.
- **SHINGLE TAB ADHESIVE:** Use asphalt plastic cement conforming to ASTM D4586 Type I or II.
- **THROUGH VENTILATION:** All roof structures must be provided with through ventilation to prevent entrapment of moisture-laden air behind roof sheathing. Proper ventilation is also necessary to prevent mold growth. Ventilation provisions must at least meet or exceed current F.H.A., H.U.D. or local code minimum requirements. NOTE: Minimum net free ventilation area of 1 sq. foot per 150 sq. feet (1 sq. meter per 150 sq. meters) of ceiling area is required. When vents are located at the eaves and near the roof's peak (balanced) for maximum air flow, ventilation may be reduced to 1 sq. foot per 300 sq. feet (1 sq. meter per 300 sq. meters).
- **NON-CORRODING METAL DRIP EDGES:** Recommended along rake and eave edges on all decks, especially plywood decks.
- **EXPOSED METAL:** All exposed metal surfaces (flashing, vents, etc.) should be painted with matching GAF-Elk roof accessory paint.

## 1 Underlayment: Standard Slope—4/12 (333mm/m) or more

**Application of underlayment:** Cover deck with one layer of underlayment installed without wrinkles. Use only enough nails to hold underlayment in place until covered by shingles.  
**Application of eave flashing:** Install eave flashing such as GAF-Elk Weather Watch®, StormGuard®, or other GAF-Elk Leak Barrier in localities where leaks may be caused by water backing up behind ice or debris dams. Eave flashing must not overhang the eave edge by more than 1/4" (6mm) and extend 24" (610mm) beyond the inside wall line.





Minimum Slope. For lower slopes, see Box 1a.

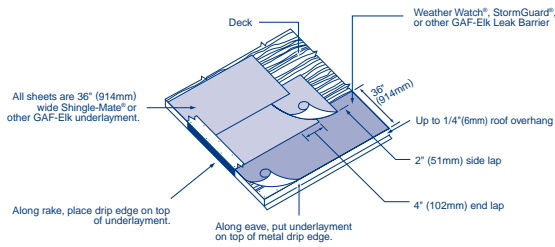

## 1a Underlayment: Low Slope 2/12-4/12 (167mm-333mm/m)

**Application of underlayment and eave flashing:** Completely cover the deck with two layers of underlayment as shown. Use only enough nails to hold underlayment in place until covered by shingles. Use blind nailing for eave flashings. At eaves and where ice dams can be expected, use one layer of GAF-Elk Weather Watch®, StormGuard® or other GAF-Elk Leak Barrier. Eave flashing must not overhang the roof eave edge by more than 1/4" (6mm) and extend 24" (610mm) beyond the inside wall line. Where ice dams or debris dams are not expected, install 2 plies of Shingle-Mate® underlayment.

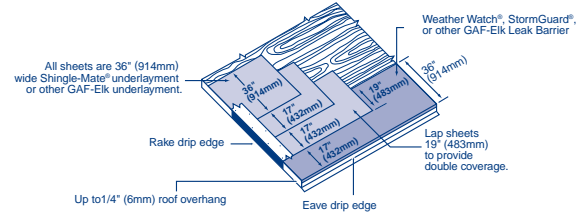


## 2 Starter Course

Apply as shown. **Note:** GAF-Elk Weather Blocker™ starter strips shingles are recommended at the eaves and rakes for best performance and required for the best limited wind warranties on certain products (see limited warranty for details).


Start at either rake and lay in either direction

Non-corroding Metal Drip Edge

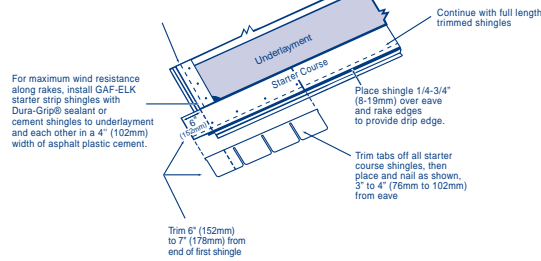


## 3 First Course

Start and continue with full shingles laid flush with the starter course. Shingles may be laid from left to right or right to left. **DO NOT** lay shingles straight up the roof since this procedure can cause an incorrect color blend on the roof and may damage the shingles.

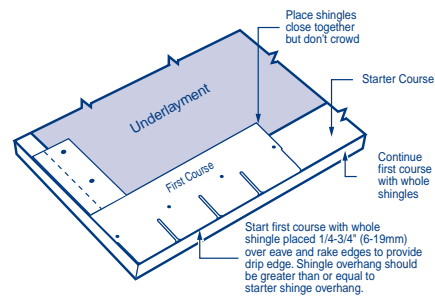


## 4 Second Course

Trim 5" (127mm) from shingle at alignment slit. Position shingle on top of cut-out of underlying shingle so that there will be 7-1/2" (191mm) of each shingle exposed. Strike a chalk line every 3-4 courses to check parallel alignment with eaves. Factory applied self-sealing dots on lower courses are designed to seal down the shingle tab in an upper course. **NOTE:** Shingles may be laid from either left or right hand side. Start at either rake edge with shingles having 5" (127mm) trimmed from rake.

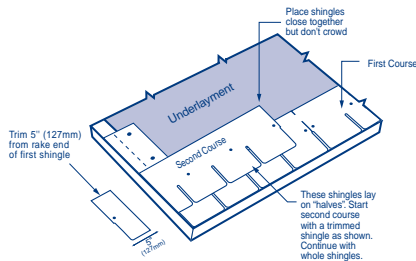


## 5 Third Course

Start at the rake edge and trim shingle 10" (254mm).

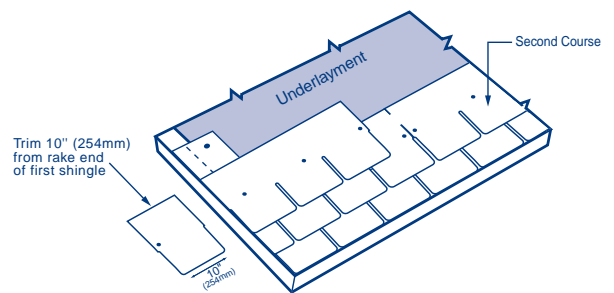

## 6 Fourth and Remaining Courses


**Fourth Course:** start at the rake edge and trim 15" (381mm). **Fifth and subsequent courses** repeat steps 3-6, i.e., fifth is full shingle, sixth, trim 5" (127mm), seventh, trim 10" (254mm), eighth, trim 15" (381mm), then repeat steps 3-6 again.

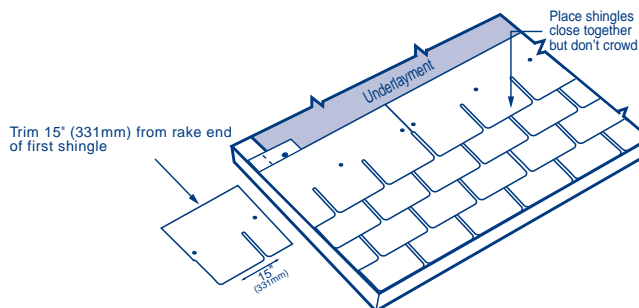


## 7 Hip and Ridge

Install GAF-Elk Timbertex®, Z® Ridge, Seal-A-Ridge®, or Ridglass® hip and ridge shingles (check regional availability). Follow the application instructions shown on the hip and ridge wrapper.


## 8 Wall Flashing (Sloped Roof to Vertical Wall)

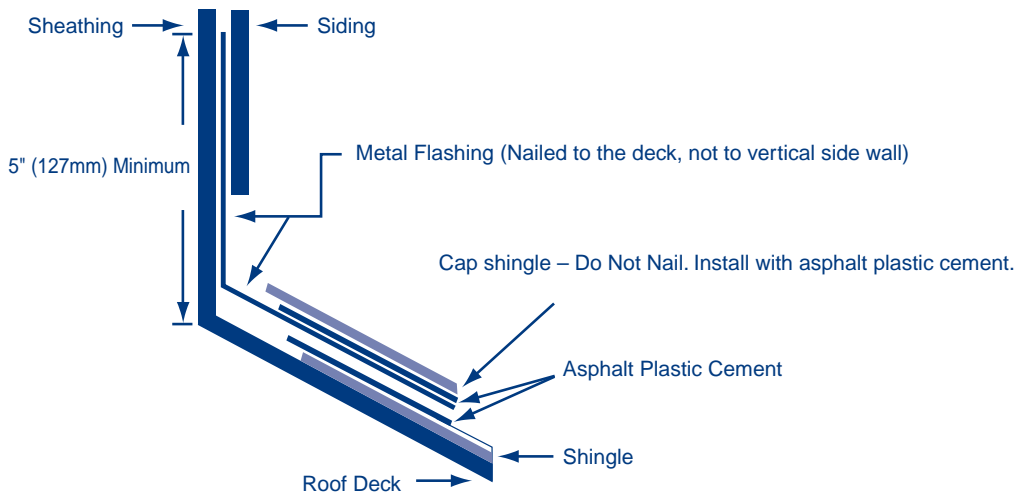

## 9 Chimney Flashing

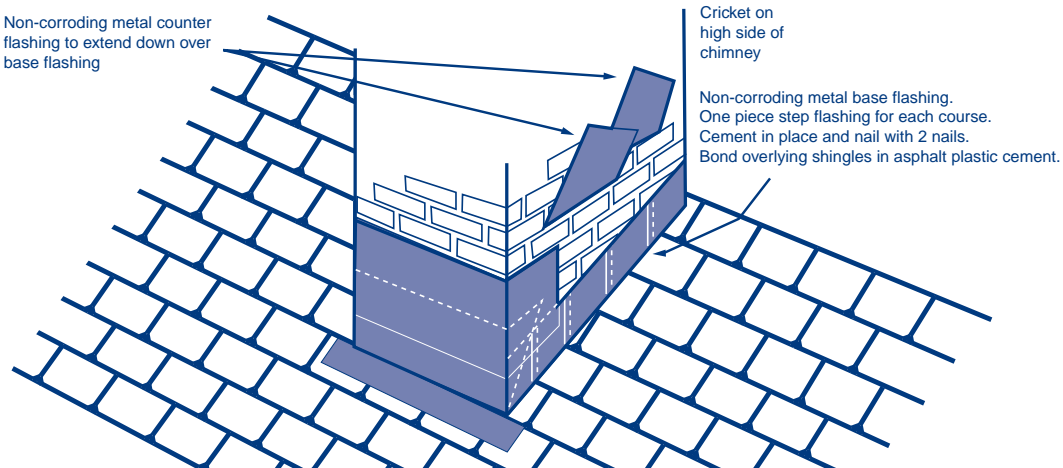


## 10 Valley Construction—Open (Recommended)

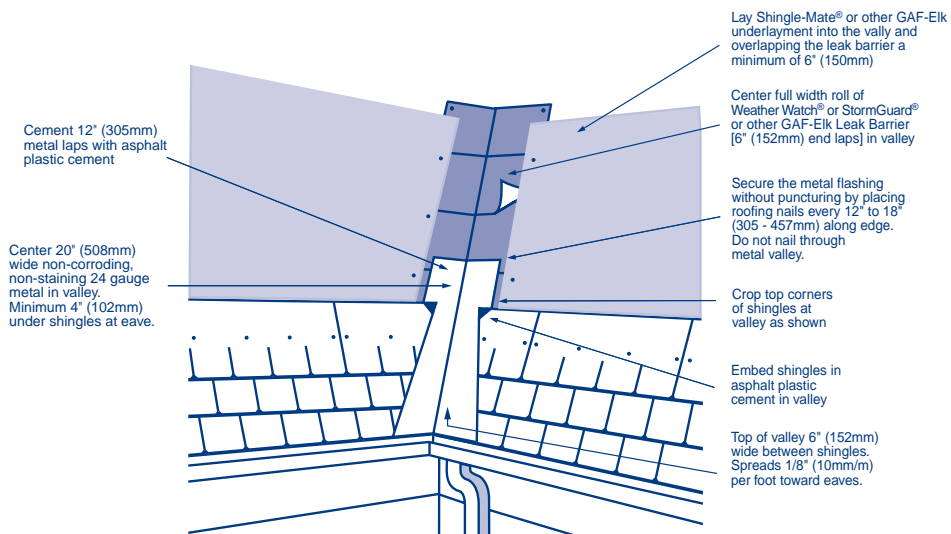

## 11 Valley Construction—Closed Cut (Option)

IMPORTANT NOTE: Do not use a "California Valley" (shingles installed parallel to the valley center line), which can cause leaking.

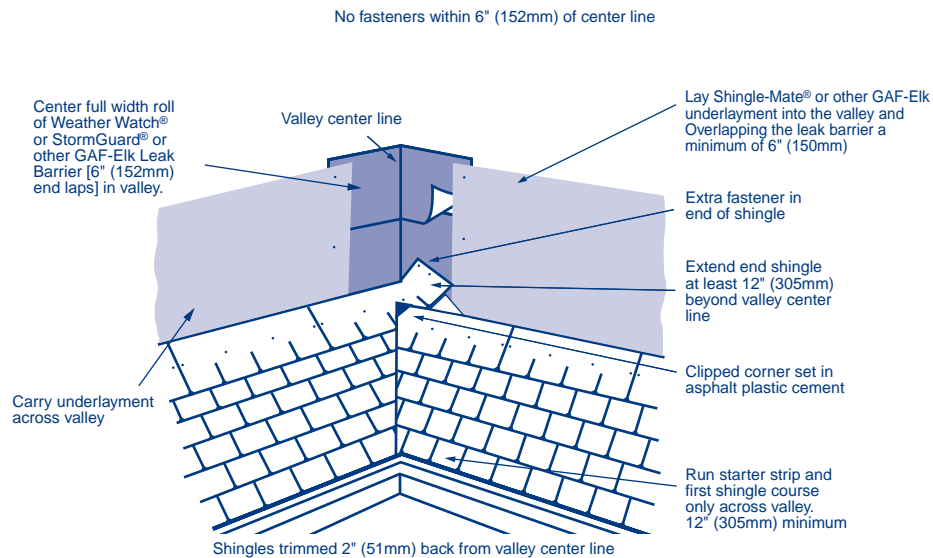

## Precautionary Notes

These shingles are fiberglass, self-sealing asphalt shingles. Because of the natural characteristics of the high quality waterproofing material used, these shingles will be stiff in cold weather and flexible in hot weather.

1. These shingles are particularly tough, heavyweight shingles with a definitely rugged looking appearance. They require additional effort to trim to fit on the roof. Curved blade utility knives are more effective than straight bladed utility knives in cutting these shingles. Using a circular saw equipped with carbide tipped blades is also effective.
2. Regardless of the tool used, always wear proper protective wear, i.e., gloves, eye protection, etc., follow all protection procedures and use tools carefully to prevent personal injury when working with these heavier products.
3. Do not drop bundles on edge or on other bundles to separate shingles. Do not load bundles across a hip or ridge. Do not bend bundles over shoulder for carrying. Premium weight may cause cracks at sharp bend points.
4. Handle carefully. Shingles can easily be broken in cold weather or their edges damaged in hot weather.
5. Store in a covered, ventilated area—maximum temperature 110°F (43°C). Store on flat surface and use weight equalization boards if pallets are to be double stacked. Shingles must be protected from weather when stored at job site. Do not store near steam pipes, radiators, etc., or in sunlight.
6. If shingles are to be applied during PROLONGED COLD periods or in areas where airborne dust or sand can be expected before sealing occurs, the shingles **MUST** be hand sealed. See "Wind Resistance/Hand Sealing" instructions.

**IMPORTANT:** Repair leaks promptly to avoid adverse effects, including mold growth.

### Re-Roofing

If old asphalt shingles are to remain in place, nail down or cut away all loose, curled or lifted shingles; replace with new; and just before applying the new roofing, sweep the surface clean of all loose debris. Since any irregularities may show through the new shingles, be sure the underlying shingles provide a smooth surface. Fasteners must be long enough to penetrate the wood deck at least 3/4" (19mm) or just through plywood. Follow above instructions for application.

**Note:** Shingles can be applied over wood shingles if the surface can be made smooth enough. This may include cutting back old shingles at eaves and rakes and installing new wood edging strips as needed, and the use of beveled wood strips. Install #30 underlayment to maintain Class A rating.

For more information, visit our website at [www.gaf.com](http://www.gaf.com).